F65EAC-IT32

Full IP65 Rugged Embedded PC with M12 Connector, Intel® Core™ i5-1135G7



KEY FEATURES

- Full IP65 rugged embedded pc, aluminum profile with fin
- Ultra compact size with fanless design, box PC with M12 connector
- Support M.2 SSD
- One M.2 socket expansion
- 9~36V DC with isolation
- 11th Generation (Tiger Lake) Intel® Core™ i5-1135G7 Processor
- M12 waterproof connector



SPECIFICATIONS

System Specification

WLAN Support (Optional) BT Support (Optional) Processor Intel Core i5-1135G7 2.4GHz (up to 4.2GHz) Memory and in the controller in the con				
Storage 1 x M.2 M.Key 2242 SATA SSD or 1 x M.2 M.Key 2800 NVMe SSD 1280 (Polional) 1280 (Polio	WLAN	Support (Optional)	ВТ	Support (Optional)
280 NVMe SSD 128GB 256GB (Optional) 512GB (Optional) 17B(for NVMe) (Optional) 47B(for NVMe	Processor	Intel Core i5-1135G7 2.4GHz (up to 4.2GHz)	Memory	8GB (Optional) 16GB (Optional)
Windows 11 Pro 64 bit (Optional) Windows 11 Pro 64 bit (Optional) Windows 11 Pro 64 bit (Optional)	Storage	2280 NVMe SSD 128GB 256GB (Optional) 512GB (Optional) 1TB(for NVMe) (Optional) 2TB(for NVMe) (Optional)	Ethernet controller	2 x Intel® Ethernet Controller
Dimension 260.4 x 193 x 50.1 mm(w/o desk mount bracket) 275.4 x 193 x 56.1 mm(w/i desk mount bracket) 275.4 x 193	Security	TPM 2.0	Operating System	Windows 11 Pro 64 bit (Optional) Windows 10 IoT Enterprise (64 bit) (Optional)
Mounting Desk Mount Enclosure Aluminum Housing Cooling System Fanless design Environment Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature Storage Temperature Vibration 5Hz~500Hz / 1Grms / 3 axis IP rating IP65 Certification CE, FCC IO Ports Power Input 1 x M12 waterproof connector for 9~36V DC USB Port 1 x M12 waterproof USB Type-A Connector with cover Serial Port 1 x M12 waterproof connector for RS232 2 video 1 x M21 type connector for HDMI output	Mechanical			
Cooling System Fanless design Environment Operating Temperature Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature 0°C to 50°C Storage Temperature -20°C to 60°C Shock 15G, 11ms duration Vibration 5Hz~500Hz / 1Grms / 3 axis IP rating IP65 Certification Certification Certification CE, FCC IO Ports Power Input 1 x M12 waterproof connector for 9~36V DC USB Port 1 x M12 waterproof connector for LSB Type-A Connector with cover 1 x Waterproof USB Type-A Connector with cover 2 x USB2.0 1 x Waterproof USB Type-A Connector for HDMI output	Dimension		Weight	3.0 kg
Comparison Humidity 10% to 90% RH, Non-Condensing Comparison Premperature Condensing C	Mounting	Desk Mount	Enclosure	Aluminum Housing
Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature 15G, 11ms duration Storage Temperature -20°C to 60°C Shock 15G, 11ms duration Vibration 5Hz~500Hz / 1Grms / 3 axis IP rating IP65 Certification Certification CE, FCC IO Ports Power Input 1 x M12 waterproof connector for 9~36V DC USB Port 1 x M12 waterproof connector for 2 x USB2.0 1 x Waterproof USB Type-A Connector with cover Serial Port 1 x M12 waterproof connector for RS232 2 x M12 waterproof connector for RS232 2 x M12 waterproof connector for RS232	Cooling System	Fanless design		
Storage Temperature Storage Temperature Vibration 5Hz~500Hz / 1Grms / 3 axis IP rating IP65 Certification Certification CE, FCC IO Ports Power Input 1 x M12 waterproof connector for 9~36V DC USB Port 1 x M12 waterproof Connector for 2 x USB2.0 1 x Waterproof USB Type-A Connector with cover 2 x M12 waterproof connector for RS232 2 x M12 waterproof connector for RS232 2 x M12 waterproof connector for RS232	Environment			
Vibration 5Hz~500Hz / 1Grms / 3 axis IP rating IP65 Certification CE, FCC IO Ports Power Input 1 x M12 waterproof connector for 9~36V DC USB Port 1 x M12 waterproof connector for 2 x USB2.0 1 x Waterproof USB Type-A Connector with cover Serial Port 1 x M12 waterproof connector for RS232 2 x M12 waterproof connector for RS232 2 x M12 waterproof connector for RS232	Operating Humidity	10% to 90% RH, Non-Condensing		0°C to 50°C
Certification CE, FCC IO Ports Power Input 1 x M12 waterproof connector for 9~36V DC Serial Port 1 x M12 waterproof connector for RS232 2 x M12 waterproof connector for RS232 2 x M12 waterproof connector for RS232		-20°C to 60°C	Shock	15G, 11ms duration
Certification CE, FCC IO Ports Power Input 1 x M12 waterproof connector for 9~36V DC USB Port 1 x M12 waterproof connector for 2 x USB2.0 1 x Waterproof USB Type-A Connector with cover Serial Port 1 x M12 waterproof connector for RS232 2 x M12 waterproof connector for RS232	Vibration	5Hz~500Hz / 1Grms / 3 axis	IP rating	IP65
Power Input 1 x M12 waterproof connector for 9~36V DC USB Port 1 x M12 waterproof connector for 2 x USB2.0 1 x Waterproof USB Type-A Connector with cover Serial Port 1 x M12 waterproof connector for RS232 2 x M12 waterproof connector for RS232 2 x M12 waterproof connector for RS232	Certification			
Power Input 1 x M12 waterproof connector for 9~36V DC USB Port 1 x M12 waterproof connector for 2 x USB2.0 1 x Waterproof USB Type-A Connector with cover Serial Port 1 x M12 waterproof connector for RS232 2 x M12 waterproof connector for RS232 2 x M12 waterproof connector for RS232	Certification	CE, FCC		
Serial Port 1 x M12 waterproof connector for RS232 Video 1x M21 type connector for HDMI output 2 x M12 waterproof connector for RS232	IO Ports			
2 x M12 waterproof connector for RS232	Power Input	1 x M12 waterproof connector for 9~36V DC	USB Port	1 x M12 waterproof connector for 2 x USB2.0 1 x Waterproof USB Type-A Connector with cover
	Serial Port	2 x M12 waterproof connector for RS232	Video	1x M21 type connector for HDMI output

Expansion Port 2 x M.2 slot(1 for WiFi, 1 for SSD) LAN 2 x M12 type connector for Giga LAN Indicator 1 x LED Indicator for power

1 x LED Indicator for storage 2 x LED Indicator for LAN

DIDO 1x M12 type connector for Digital 4 in/ 4 out (Optional)

Control

Button 1 x Power Button with LED Indicator

Accessory

Accessory External open wire Power cable with waterproof

connector

External USB cable with waterproof connector External HDMI cable with waterproof connector External COM cable with waterproof connector External LAN cable with waterproof connector External VGA cable with waterproof connector

Waterproof caps

RJ45 female-female converter

Optional Accessory 100~240V AC to DC Adapter with waterproof connector (Optional)


Power Cord (Optional)

External DIDO cable with waterproof connector

(Optional)

DIMENSIONS

UNIT:MM

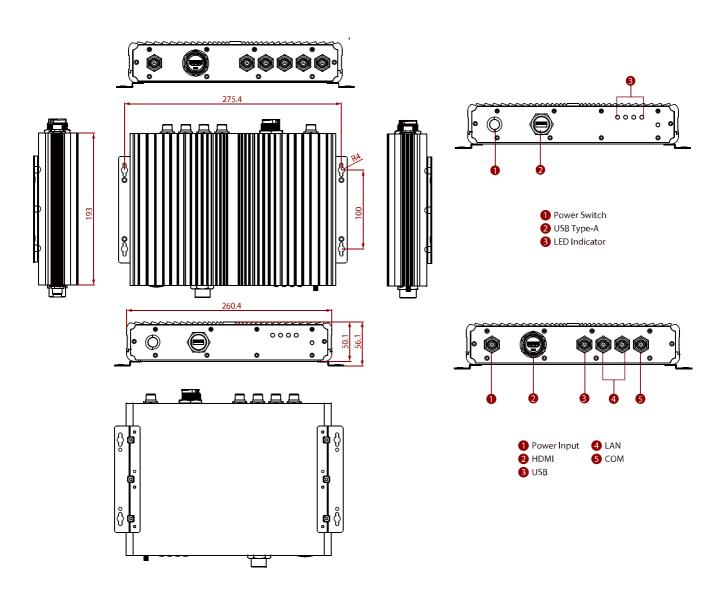

NOTE

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. Please contact our sales representative if you need further product information.
- 3. A customized housing is required if you need additional I/O connectors.
- 4. To connect Winmate stainless series Panel PC or Display it is required to use an optional two sides waterproof connector.
- 5. All specifications are subject to change without prior notice.
- 6. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.