

R10L100-CHT2

10.4" Chassis Display



KEY FEATURES


- 10.4", 1024x768
- VGA and HDMI input
- Chassis
- VESA mount



SPECIFICATIONS

| Display | |
|------------------------------|--|
| Resolution | 1024x768 |
| Contrast Ratio | 1000:1 |
| Display Color | 16.2M Colors |
| Active Area | 210.4x157.8 mm |
| Size | 10.4 inches |
| Panel Brightness | 350 nits |
| View Angles | 88,88,88,88 |
| Touch / Glass | Resistive Touch Screen Protection Glass w/o Touch Function (Optional) SAW Touch (Surface Acoustic Wave) (Optional) |
| Environment | |
| Operating Humidity | 10% to 90% (non-condensing) |
| Storage Temperature | -10~60°C |
| Operating Temperature | 0~50°C |
| Certification | |
| Certification | CE, FCC |
| IO Ports | |
| USB Port | 1 x USB for Touch Screen |
| Audio | Audio line in (3.5mm) (Optional) 2 x Speaker (Optional) |
| Video | 1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional) |
| Mechanical | |
| Dimension | 259.6 x 196.6 x 45 mm |
| Enclosure | Metal Housing with Aluminum Bezel |
| Mounting | VESA Mount |
| Cooling System | Fanless Design |
| Accessory | |
| Accessory | 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) |
| Optional Accessory | Remote Controller (Optional,Varies by product) |
| Power | |
| Power Rating | 12V DC input |
| Control | |

DIMENSIONS UNIT:MM

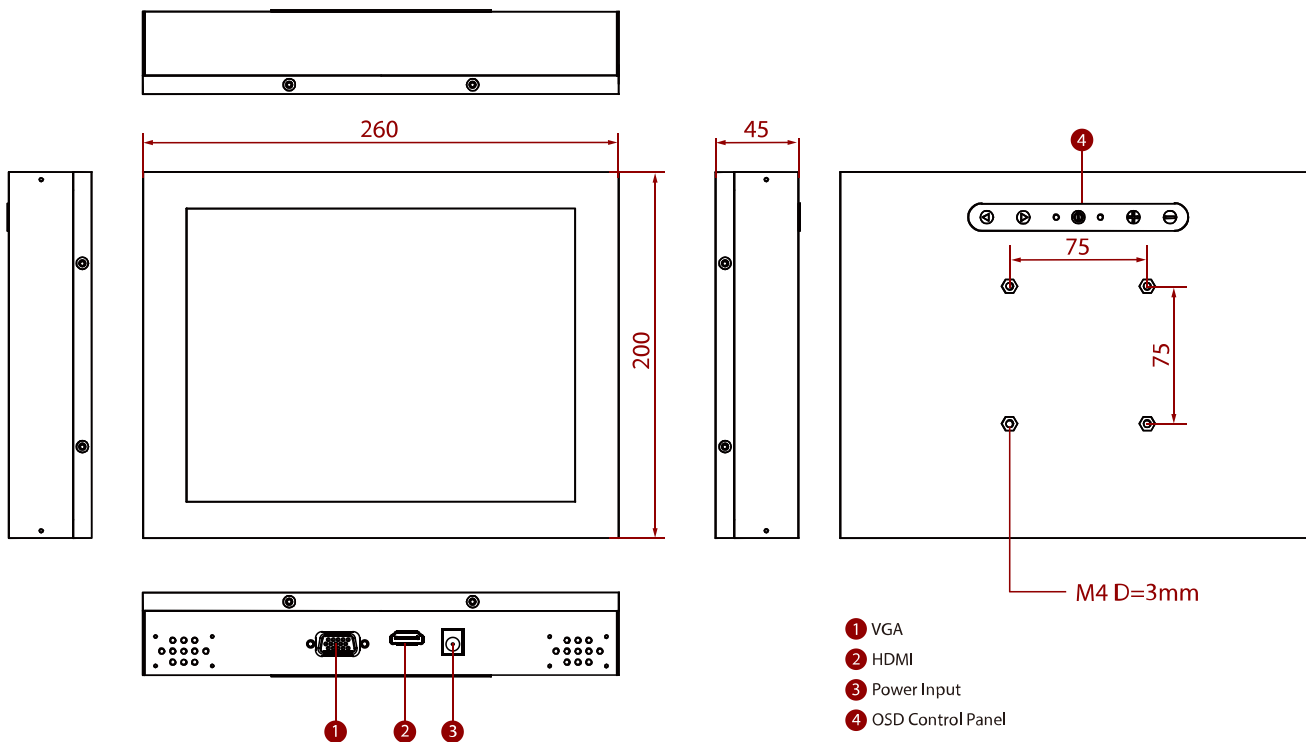

NOTE

1. The mechanical drawing may change when adding a touch screen.
2. Please contact our sales representative if you need further product information.
3. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.