

# R10L100-PCT2(HB)

## 10.4" Multi-Touch Chassis Industrial LCD Monitor




### KEY FEATURES

- 10.4" 1024 x 768 Resolution, Industrial LCD Monitor
- Optional High Brightness 1000 nit display
- Projected Capacitive Multi-Touch (P-Cap)
- Front IP65 Water and Dust Proof
- VGA input and variety of optional connectors
- USB port for touch
- Stylish and elegant design



### SPECIFICATIONS

Display			
<b>Touch / Glass</b>	Projected Capacitive Multi Touch Screen	<b>Resolution</b>	1024x768
<b>Size</b>	10.4 inches	<b>Contrast Ratio</b>	1000:1
<b>Panel Brightness</b>	350 nits 1000 nits(Optional)	<b>Display Color</b>	16.2M Colors
<b>View Angles</b>	88,88,88,88		
Environment			
<b>Operating Humidity</b>	10% to 90% (non-condensing)	<b>Operating Temperature</b>	0~50°C
<b>Storage Temperature</b>	-10~60°C		
Certification			
<b>Certification</b>	CE, FCC		
IO Ports			
<b>USB Port</b>	1 x USB for Touch Screen	<b>Video</b>	1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional)
Mechanical			
<b>Dimension</b>	252.41 x 197.8 x 43 mm	<b>Mounting</b>	VESA Mount
<b>Enclosure</b>	Metal	<b>Cooling System</b>	Fanless Design
Accessory			
<b>Accessory</b>	1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)	<b>Optional Accessory</b>	Remote Controller (Optional,Varies by product)
Power			
<b>Power Rating</b>	12V DC input		
Control			
<b>Button</b>	5 Keys: -, +, Power, Esc, Enter		

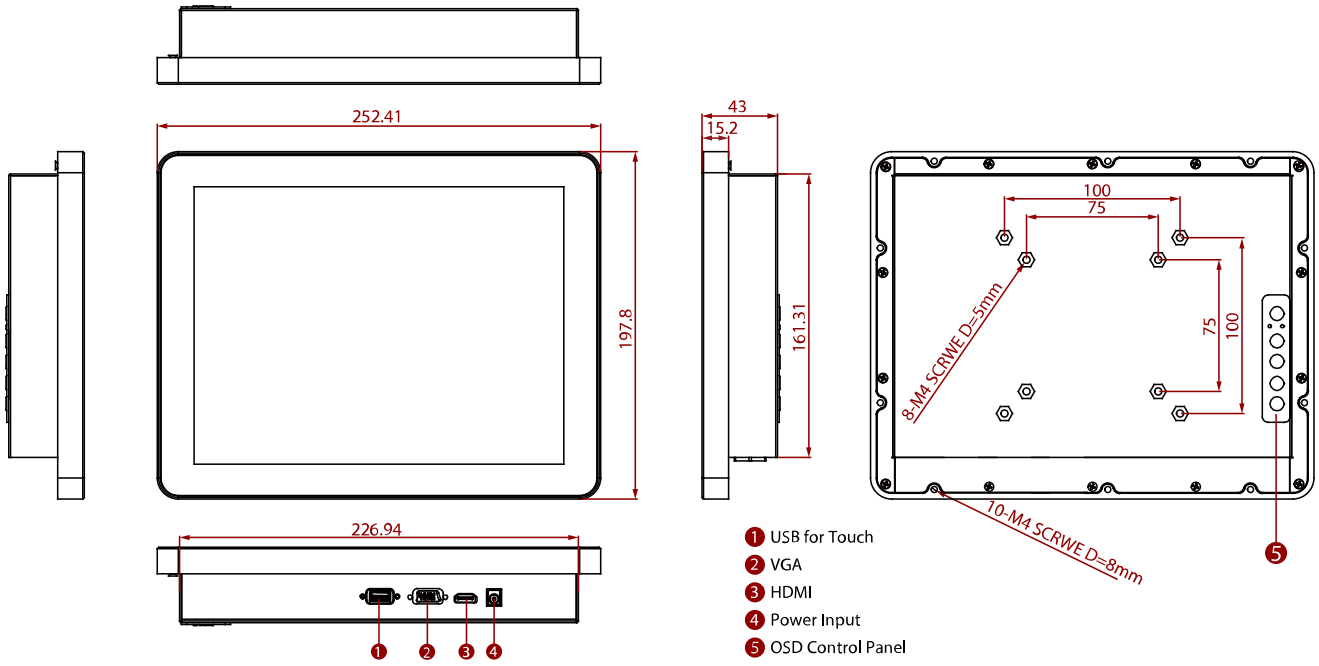

**NOTE**

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.