

# R15IB7T-CHC3

## 15" Intel® Celeron® N2930 Chassis Panel PC



### KEY FEATURES

- 15" TFT XGA LCD
- Intel® Celeron® Bay Trail-M N2930 1.83GHz Processor
- SO-DIMM DDR3L 1600, max. 8 GB
- Integrated VGA, 24 bit Dual-channel LVDS, DVI
- Integrated Dual Broadcom I210AT GbE Controller
- 1 x SATA II, 3 x COM, 3 x USB 2.0, 1 x USB 3.0, 2 x Mini PCIe slot




### SPECIFICATIONS

Display			
<b>Resolution</b>	1024x768	<b>Size</b>	15.0 inches
<b>Contrast Ratio</b>	2000:1	<b>Panel Brightness</b>	300.0 nits
<b>View Angles</b>	88, 88, 88, 88	<b>Active Area</b>	304.1x228.1 mm
<b>Touch / Glass</b>	Resistive Touch Screen (Optional) Protection Glass Without Touch Function (Optional)		
System Specification			
<b>Processor</b>	Intel Celeron N2930 1.83GHz (up to 2.16GHz)	<b>Memory</b>	2 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional)
<b>Storage</b>	1 x mSATA SSD 128GB mSATA SSD up to 512GB (Optional) 1 x SATA II for 2.5" HDD (Optional)	<b>Ethernet controller</b>	2 x Intel® Ethernet Controller
<b>Operating System</b>	Windows 7 Embedded Systems (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 20.04 (Optional)	<b>WLAN</b>	Support (Optional)
<b>BT</b>	Support (Optional)		
Mechanical			
<b>Dimension</b>	360 x 290 x 79 mm	<b>Mounting</b>	VESA Mount
<b>Enclosure</b>	Metal Housing	<b>Cooling System</b>	Fanless design
Environment			
<b>Operating Humidity</b>	10% to 90% RH, Non-Condensing	<b>Operating Temperature</b>	0°C to 50°C
<b>Storage Temperature</b>	-10°C to 60°C		
Certification			
<b>Certification</b>	CE, FCC		
IO Ports			
<b>Power Input</b>	1 x 12V DC, Din4 pin connector	<b>USB Port</b>	1 x USB3.2 Gen1x1 (Type-A) 3 x USB2.0 (Type-A)
<b>Serial Port</b>	1 x RS232/422/485 (Default RS232) 2 x RS232 1 x RS232 (Optional)	<b>Video</b>	1 x VGA
<b>Audio</b>	Mic in	<b>Expansion Port</b>	2 x mPCIe slot

	Line in Line out		
<b>LAN</b>	2 x Giga LAN RJ45 Connector	<b>Indicator</b>	1 x LED Indicator for power 1 x LED Indicator for storage
<b>Brightness Knob</b>	1 x Brightness Adjustment Knob	<b>PS/2</b>	2 x PS/2
<b>mini PCIe</b>	3 x Mini PCIe		
<b>Control</b>			
<b>Button</b>	1 x Power Button 1 x Reset Button		
<b>Accessory</b>			
<b>Accessory</b>	100~240V AC to DC Adapter Power Cord VESA screws		
<b>Power</b>			
<b>Power Rating</b>	12V DC	<b>Adapter</b>	12V 50W

## DIMENSIONS UNIT:MM

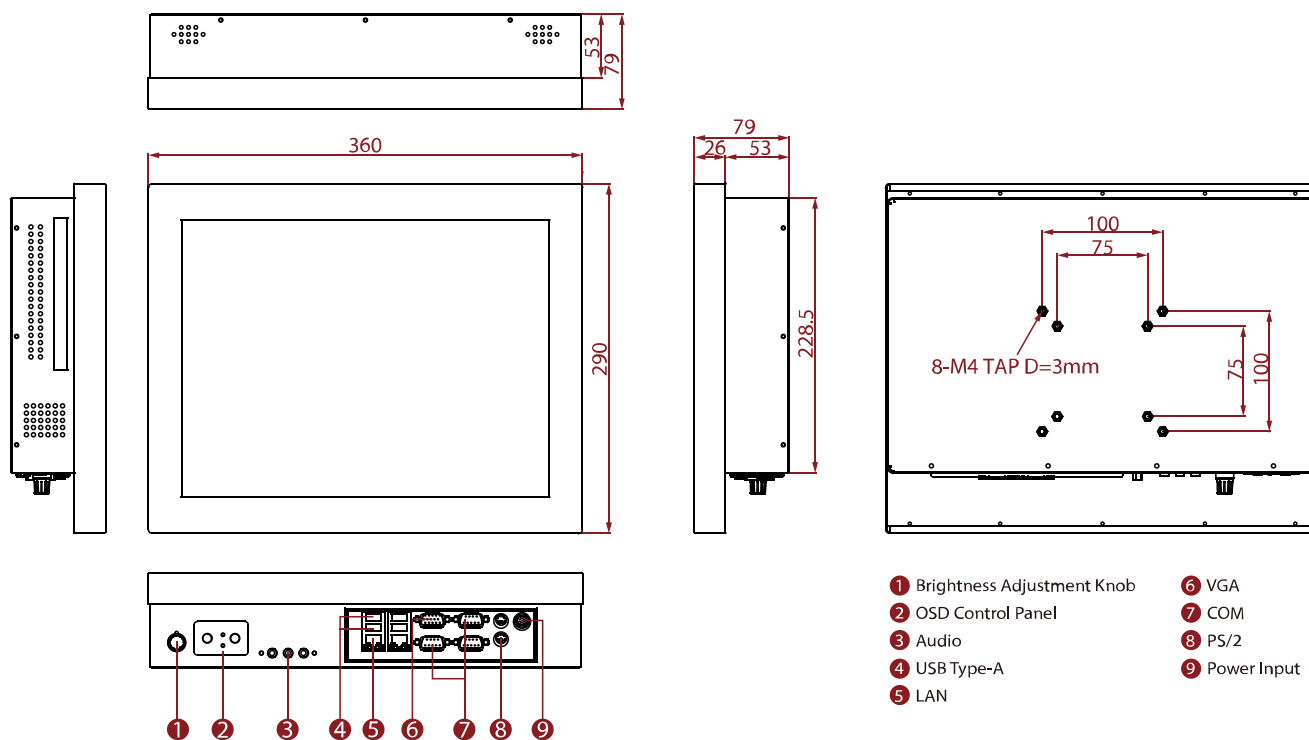

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. All specifications are subject to change without prior notice.
3. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.