

R15L100-SDA3

15" SDI Chassis Display



KEY FEATURES

- 15", 1024 x 768
- G-SDI in, 3G-SDI out, HDMI, VGA, two CVBS (BNC)
- Chassis
- VESA mount



SPECIFICATIONS


| Display | | | |
|---------------------|---|-----------------------|--|
| Resolution | 1024x768 | Size | 15.0 inches |
| Contrast Ratio | 2500:1 | Panel Brightness | 500.0 nits |
| Display Color | 16.7M Colors | View Angles | 88,88,88,88 |
| Active Area | 304.1x228.1 mm | Touch / Glass | Projected Capacitive Multi Touch Screen Bonding with Panel |
| Environment | | | |
| Operating Humidity | 10% to 90% RH, Non-Condensing | Operating Temperature | 0°C to 50°C |
| Storage Temperature | -10°C to 60°C | | |
| Certification | | | |
| Certification | CE, FCC | | |
| IO Ports | | | |
| USB Port | 1 x USB for Touch Screen | Video | 1 x VGA In 2 x CVBS 1 x SDI in 1 x SDI out 1 x HDMI (Optional) |
| Audio | 2 x Speaker (Optional) | | |
| Mechanical | | | |
| Dimension | 350.2 x 274.2 x 35 mm | Mounting | VESA Mount |
| Enclosure | Metal | Cooling System | Fanless Design |
| Accessory | | | |
| Accessory | User Manual(Hardcopy) Black Screw Bolts 110~240V AC Power Adapter Power Cord VGA Cable HDMI Cable SDI Cable CVBS cable | | |
| Power | | | |
| Power Rating | 12V DC in | | |

24V DC in (optional)

Control

| | |
|---------------|--|
| Button | 8 key: Power Up Down Menu/Enter Left Right Exit Auto |
|---------------|--|

DIMENSIONS UNIT:MM

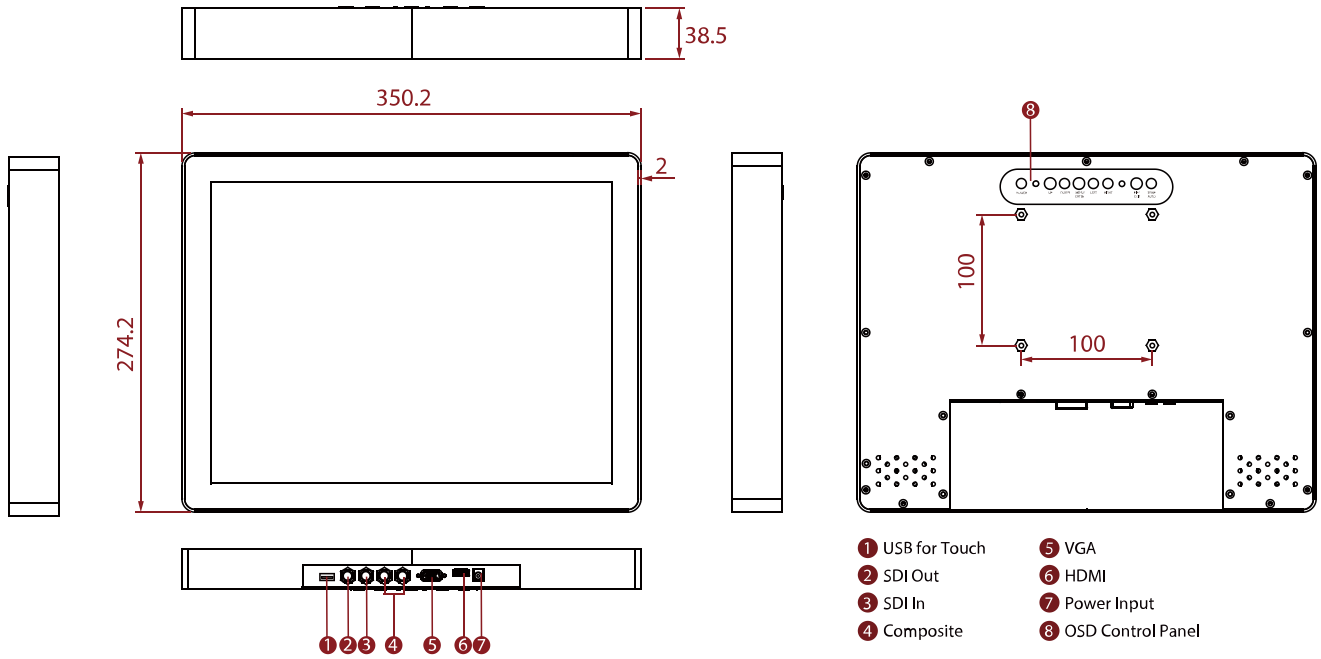

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.