

# R17IB7T-RKM1

## 17" Intel® Celeron® N2930 Rack Mount Panel PC



### KEY FEATURES

- 17" TFT LCD
- Intel® Celeron® Bay Trail-M N2930, 1.83 GHz
- SODIMM DDR3L 1600/1333, max. 8 GB
- Intel® I210-AT GbE LAN
- 2 x RS232, 1 x RS232/422/485, 1 x USB 3.0, 3 x USB 2.0, 2 x PS/2, 2 x RJ45, 1 x VGA, 2 x Mini PCIe (1 for WiFi, 1 for 3G Module), 1 x eDP
- 2 x Mini PCIe (1 for WiFi, 1 for 3G Module), 1 x eDP



### SPECIFICATIONS

Display	
<b>Resolution</b>	1280x1024
<b>Contrast Ratio</b>	1000:1
<b>View Angles</b>	85,85,80,80
<b>Touch / Glass</b>	Resistive Touch Screen (Optional) Protection Glass Without Touch Function (Optional)
<b>Size</b>	17.0 inches
<b>Panel Brightness</b>	350.0 nits
<b>Active Area</b>	337.920x270.336 mm
System Specification	
<b>Processor</b>	Intel Celeron N2930 1.83GHz (up to 2.16GHz)
<b>Storage</b>	1 x mSATA SSD 128GB mSATA SSD up to 512GB (Optional) 1 x SATA II for 2.5" HDD (Optional)
<b>Operating System</b>	Windows 7 Embedded Systems (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 20.04 (Optional)
<b>BT</b>	Support (Optional)
<b>Memory</b>	2 x SO-DIMM, DDR3L 1600 MHz, 4GB 8GB (Optional)
<b>Ethernet controller</b>	2 x Intel® Ethernet Controller
<b>WLAN</b>	Support (Optional)
Mechanical	
<b>Dimension</b>	482.6 x 399 x 92 mm
<b>Enclosure</b>	Metal Housing
<b>Mounting</b>	VESA Mount Rack Mount (9U)
<b>Cooling System</b>	Fanless design
Environment	
<b>Operating Humidity</b>	10% to 90% RH, Non-Condensing
<b>Storage Temperature</b>	-10°C to 60°C
<b>Operating Temperature</b>	0°C to 50°C
Certification	
<b>Certification</b>	CE, FCC
IO Ports	
<b>Power Input</b>	1 x 12V DC, Din4 pin connector
<b>Serial Port</b>	1 x RS232/422/485 (Default RS232) 2 x RS232 1 x RS232 (Optional)
<b>USB Port</b>	1 x USB3.2 Gen1x1 (Type-A) 3 x USB2.0 (Type-A)
<b>Video</b>	1 x VGA

<b>Audio</b>	Mic in Line in Line out	<b>Expansion Port</b>	2 x mPCIe slot
<b>LAN</b>	2 x Giga LAN RJ45 Connector	<b>Indicator</b>	1 x LED Indicator for power 1 x LED Indicator for storage
<b>Brightness Knob</b>	1 x Brightness Adjustment Knob	<b>PS/2</b>	2 x PS/2
<b>mini PCIe</b>	3 x Mini PCIe		
<b>Control</b>			

<b>Button</b>	1 x Power Button 1 x Reset Button
---------------	--------------------------------------


### Accessory

<b>Accessory</b>	100~240V AC to DC Adapter Power Cord VESA screws
------------------	--

### Power

<b>Power Rating</b>	12V DC (Lockable Power Jack)	<b>Adapter</b>	12V 84W
---------------------	------------------------------	----------------	---------

## DIMENSIONS UNIT:MM

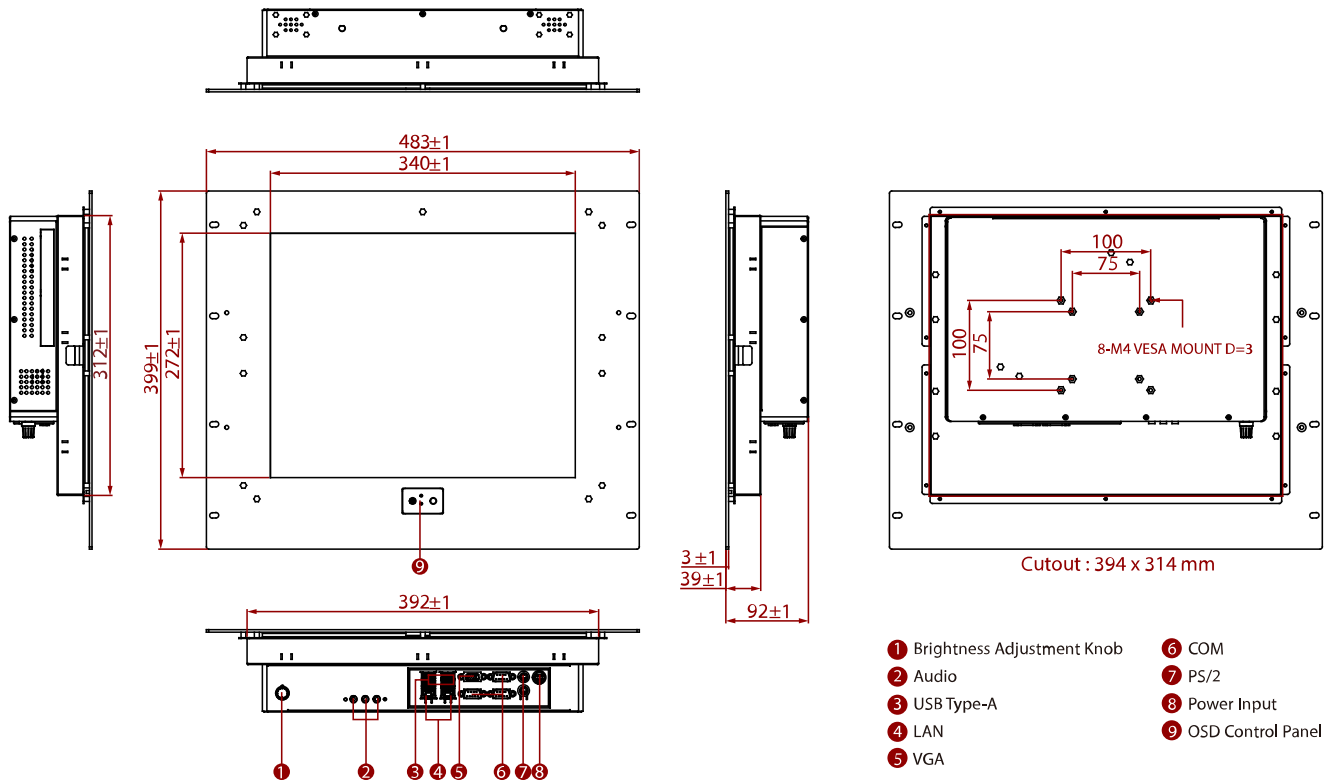

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.