

# R17IE3S-67M1ST

## 17" IP67 Stainless Resistive Chassis Panel PC with Intel® Celeron® N6211



### KEY FEATURES

- 17" 1280x1024 Resistive Touch
- Intel® Celeron® Elkhart Lake N6211 Processor
- Stainless Housing with Anti-Corrosion Treatment
- Optical Bonding with Anti-moisture Treatment
- 5 Wire Resistive Touch/ Anti-Reflection Protection Glass (Optional)



### SPECIFICATIONS

Display	
<b>Resolution</b>	1280x1024
<b>Contrast Ratio</b>	1000:1
<b>View Angles</b>	85,85,80,80
<b>Touch / Glass</b>	Resistive Touch Screen Bonding With Panel Protection Glass Without touch function (Optional)
<b>Size</b>	17.0 inches
<b>Panel Brightness</b>	350.0 nits
<b>Active Area</b>	337.920x270.336 mm
System Specification	
<b>WLAN</b>	Support (Optional)
<b>Processor</b>	Intel® Celeron® N6211 (up to 2.6GHz) Intel® Celeron® N6210 ( up to 3.0GHz)  (Optional)
<b>Storage</b>	1 x M.2 2242 B-key SSD 128GB M.2 2242 B-key SSD up to 512GB (Optional) 1 x SATA III for 2.5" SSD/HDD up to 1TB (Optional)
<b>Security</b>	TPM 2.0
<b>BT</b>	Support (Optional)
<b>Memory</b>	1 x SO-DIMM, DDR4 3200 MHz, 4GB 8GB (Optional) 16GB (Optional)
<b>Ethernet controller</b>	2 x Intel® Ethernet Controller
<b>Operating System</b>	Windows 11 IoT Enterprise SAC (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 22.04 (Optional)
Mechanical	
<b>Dimension</b>	418 x 350 x 59 mm
<b>Enclosure</b>	Stainless Housing
<b>Mounting</b>	VESA Mount Yoke Mount
<b>Cooling System</b>	Fanless design
Environment	
<b>Operating Humidity</b>	10% to 90% RH, Non-Condensing
<b>Storage Temperature</b>	-20°C to 60°C
<b>Operating Temperature</b>	0°C to 45°C
<b>IP rating</b>	IP67
Certification	
<b>Certification</b>	CE, FCC
IO Ports	
<b>Power Input</b>	1 x M12 waterproof connector for 12V DC
<b>Serial Port</b>	1 x M12 waterproof connector for RS232
<b>Indicator</b>	1 x LED Indicator for power
<b>USB Port</b>	1x M12 waterproof connector for 2 x USB2.0
<b>LAN</b>	1 x waterproof Giga LAN RJ45 connector

1 x LED Indicator for storage

### Control

Button 1 x Power Button  
1 x Reset Button


### Accessory

Accessory 100~240V AC to DC Adapter with waterproof connector  
Power Cord  
External USB cable with waterproof connector  
External COM cable with waterproof connector  
External LAN cable with waterproof connector  
Waterproof caps  
VESA screws

### Power

Power Rating 12V DC (M12 type)

## DIMENSIONS UNIT:MM

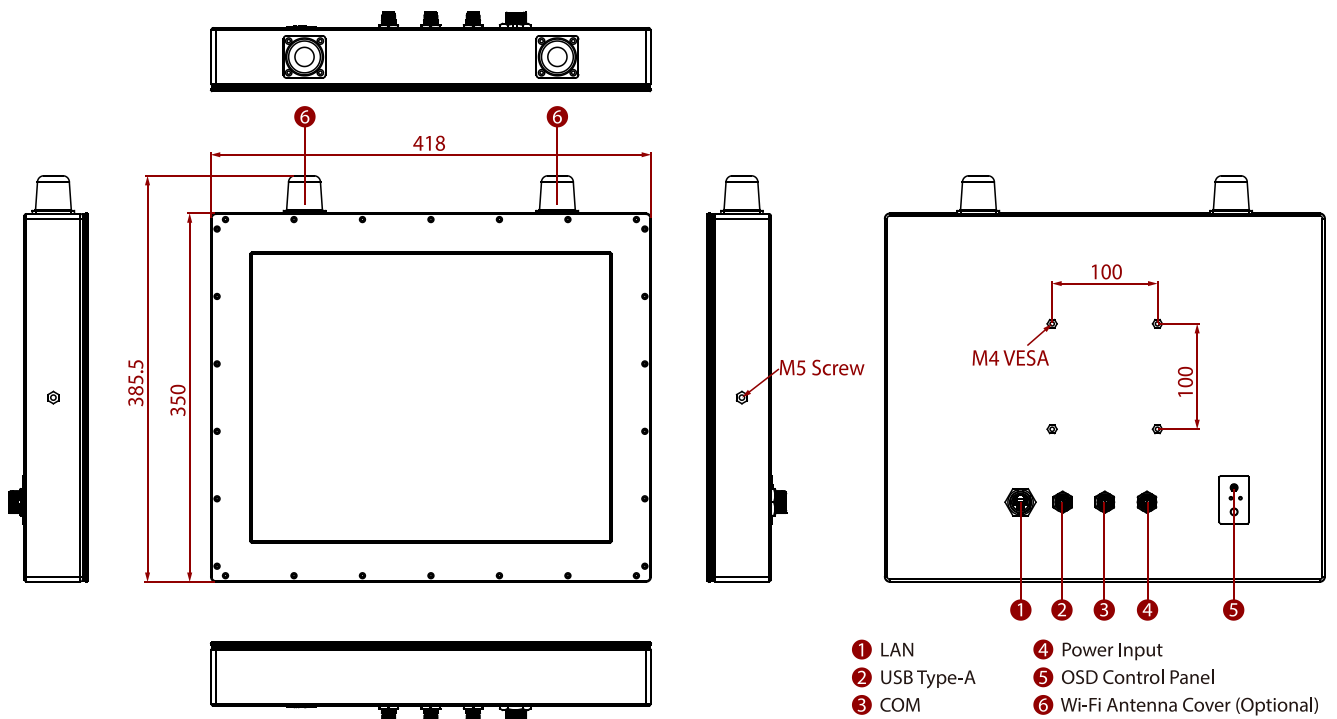

## NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.