

R19L300-SDA1

19" SDI Chassis Display



KEY FEATURES

- 19", 1280 x 1024 SDI Chassis Display
- G-SDI in, 3G-SDI out, HDMI, VGA, two CVBS (BNC)
- SDI Chassis Display
- VESA mount




SPECIFICATIONS

Display			
Resolution	1280x1024	Size	19.0 inches
Contrast Ratio	1000:1	Panel Brightness	400.0 nits
Display Color	16.7M Colors	View Angles	85,85,80,80
Active Area	376.32x301.06 mm	Touch / Glass	Projected Capacitive Multi Touch Screen
Environment			
Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C
Storage Temperature	-10°C to 60°C		
Certification			
Certification	CE, FCC		
IO Ports			
USB Port	1 x USB for Touch Screen	Video	1 x VGA In 2 x CVBS 1 x SDI in 1 x SDI out 1 x HDMI (Optional)
Audio	2 x Speaker (Optional)		
Mechanical			
Dimension	438.7 x 363.5 x 38.5 mm	Mounting	VESA Mount
Enclosure	Metal	Cooling System	Fanless Design
Accessory			
Accessory	User Manual(Hardcopy) Black Screw Bolts 110~240V AC Power Adapter Power Cord VGA Cable HDMI Cable SDI Cable CVBS cable		
Power			
Power Rating	12V DC in 24V DC in (optional)		

Control

Button	8 key: Power Up Down Menu/Enter Left Right Exit Auto
---------------	------------------------------------------------------------------------------

DIMENSIONS UNIT:MM

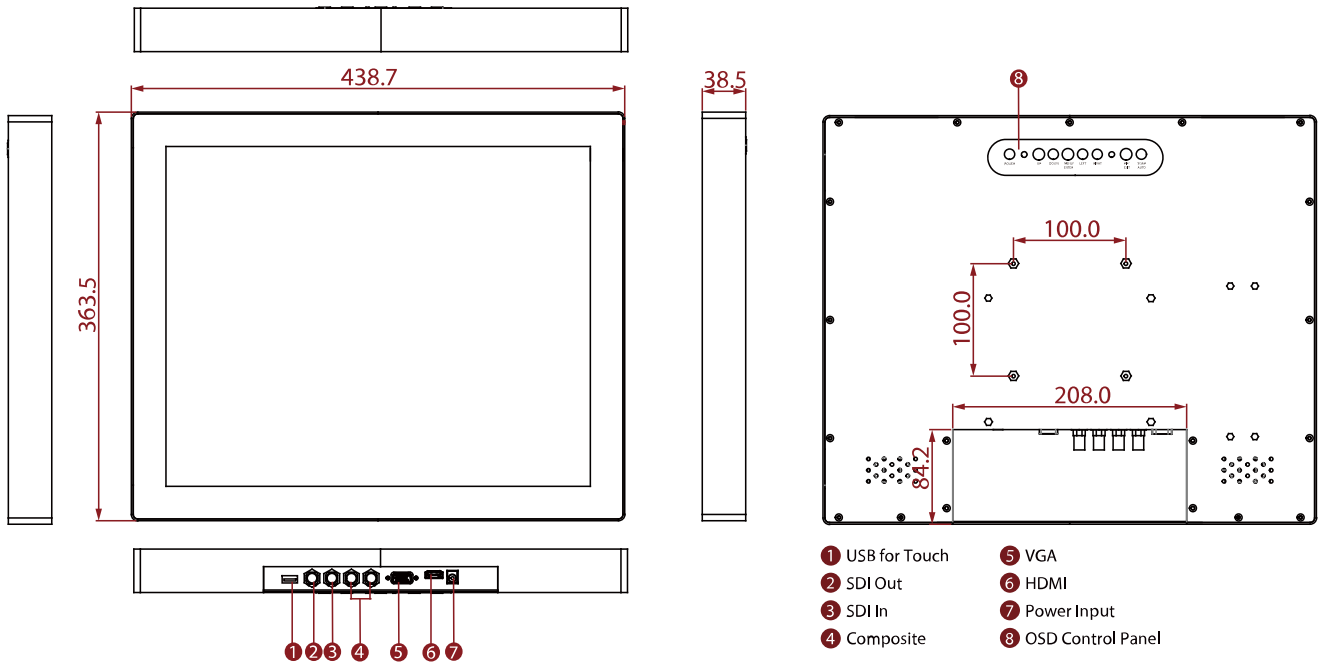

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
3. All specifications are subject to change without prior notice.