W10L100-SDH2

10.1" SDI Chassis Display



KEY FEATURES

- 10.1", 1280 x 800
- G-SDI in, 3G-SDI out, HDMI, VGA, two CVBS (BNC)
- Chassis
- VESA mount



SPECIFICATIONS

Display			
Resolution	1280x800	Size	10.1 inches
Contrast Ratio	800:1	Panel Brightness	350.0 nits
Display Color	16.7M Colors	View Angles	85,85,85,85
Active Area	216.96x135.6 mm	Touch / Glass	Projected Capacitive Multi Touch Screen
Environment			
Operating Humidity	10% to 90% RH, Non-Condensing	Operating Temperature	0°C to 50°C
Storage Temperature	-10°C to 60°C		
Certification			
Certification	CE, FCC		
IO Ports			
USB Port	1 x USB for Touch Screen	Video	1 x VGA In 2 x CVBS 1 x SDI in 1 x SDI out 1 x HDMI (Optional)
Audio	2 x Speaker (Optional)		
Mechanical			
Dimension	263.6 x 172.3 x 38.5 mm	Mounting	VESA Mount
Enclosure	Metal	Cooling System	Fanless Design
Accessory			
Accessory	User Manual(Hardcopy) Black Screw Bolts 110~240V AC Power Adapter Power Cord VGA Cable HDMI Cable SDI Cable CVBS cable		
Power			
Power Rating	12V DC in		

24V DC in (optional)


Control


Button 8 key:

Power
Up
Down
Menu/Enter
Left
Right
Exit
Auto

UNIT:MM

DIMENSIONS

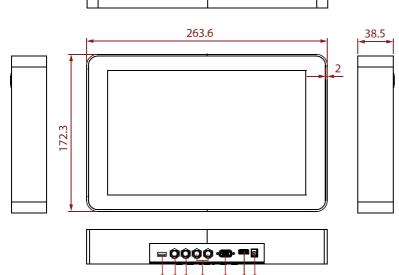



8 OSD Control Panel

4 Composite

NOTE

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.
- 3. All specifications are subject to change without prior notice.