# W24IT3S-SPA2

## 23.8" Intel® Core™ i5 IP65 Stainless PCAP Chassis Panel PC



#### **KEY FEATURES**

- 11th Generation Intel® Core™ i5-1135G7 2.4GHz (up to 4.2GHz)
- SUS 316/ AISI 316 stainless steel for food and chemical industries
- Sealed to IP65 for protection against water and dust
- A true flat, easy-to-clean front surface with edge-to-edge design
- Flat multi-touch panel pc with superior readability and P-Cap technology
- Various mounting solutions, Yoke mount and VESA mount
- Plenty of I/O s including USB 2.0, RS232 serial port and RJ45-10/100/1000 LAN ports
- Waterproof ports with adapter cables for external connectivity
- Support Glove / Rain mode
- Optical bonding (optional)



#### **SPECIFICATIONS**


View Angles   89,89,89,89   Projected Capacitive Multi Touch Screen   Projected Capacitive Multi Touch Screen	Display					
View Angles         89,89,89,89         Active Area         527.04x296.46 mm           Touch / Glass         Projected Capacitive Multi Touch Screen         Value         V	Resolution	1920x1080	Size	23.8 inches		
Touch / Glass   Projected Capacitive Multi Touch Screen	Contrast Ratio	3000:1	Panel Brightness	250.0 nits		
System Specification	View Angles	89,89,89,89	Active Area	527.04x296.46 mm		
WLAN Support (Optional)  Processor Intel Core i5-1135G7 2.4GHz (up to 4.2GHz)  Memory 1x SO-DIMM, DDR4 3200 MHz, 4GB 8GB (Optional) 16GB (Optional) 16GB (Optional) 12GB (Opti	Touch / Glass	Projected Capacitive Multi Touch Screen				
Intel Core i5-1135G7 2.4GHz (up to 4.2GHz)   Memory   1 x SO-DIMM, DDR4 3200 MHz, 4GB 8GB (Optional) 16GB (Optional) 32GB (Optional) 32GB (Optional) 32GB (Optional) 32GB (Optional) 12BGB 256GB (Optional) 11B(for NVMe) (Optional) 11B(for NVMe) (Optional) 11B(for NVMe) (Optional) 1 x SATA III , up to 2TB (Optional) 1	System Specificat	System Specification				
Storage	WLAN	Support (Optional)	ВТ	Support (Optional)		
2280 NVMe SSD 128GB 256GB (Optional) 512GB (Optional) 1TB(for NVMe) (Optional) 4TB(for NVMe) (Optional) 1 x SATA III , up to 2TB (Optional) 1 x SATA III , up to 2TB (Optional)  Mechanical  Dimension 620 x 390 x 56 mm Mounting Cooling System Fanless design  Environment  Operating Humidity 10% to 90% RH, Non-Condensing Temperature  Storage -20°C to 60°C  Prating Pives  Vindows 11 loT Enterprise SAC (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Windows 10 loT Enterprise (64 bit) (Optional) Windows 10 loT Enterprise SAC (64 bit) (Optional) Windows 11 loT Enterprise SAC (64 bit) (Optional) Windows 11 loT Enterprise SAC (64 bit) (Optional) Windows 11 loT Enterprise SAC (64 bit) (Optional) Windows 10 loT Enterprise SAC (64 bit) (Optional) Windows 10 loT Enterprise SAC (64 bit) (Optional) Windows 10 loT Enterprise SAC (64 bit) (Optional) Windows 11 loT Enterprise SAC (64 bit) (Optional) Windows 10 loT Enterprise SAC (64 bit) (Optional)	Processor	Intel Core i5-1135G7 2.4GHz (up to 4.2GHz)	Memory	8GB (Optional) 16GB (Optional)		
Windows 11 Pro 64 bit (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 22.04 (Optional)  Mechanical  Dimension 620 x 390 x 56 mm Mounting VESA Mount Yoke Mount  Enclosure Stainless Housing Cooling System Fanless design  Environment  Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature  Storage -20°C to 60°C IP rating IP65	Storage	2280 NVMe SSD 128GB 256GB (Optional) 512GB (Optional) 1TB(for NVMe) (Optional) 2TB(for NVMe) (Optional) 4TB(for NVMe) (Optional)	Ethernet controller	2 x Intel® Ethernet Controller		
Dimension     620 x 390 x 56 mm     Mounting     VESA Mount Yoke Mount       Enclosure     Stainless Housing     Cooling System     Fanless design       Environment     Operating Humidity     10% to 90% RH, Non-Condensing     Operating Temperature     0°C to 45°C       Storage     -20°C to 60°C     IP rating     IP65	Security	TPM 2.0	Operating System	Windows 10 IoT Enterprise (64 bit) (Optional)		
Finclosure Stainless Housing Cooling System Fanless design  Environment  Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature  Storage -20°C to 60°C IP rating IP65	Mechanical					
Environment  Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature  Storage -20°C to 60°C IP rating IP65	Dimension	620 x 390 x 56 mm	Mounting			
Operating Humidity 10% to 90% RH, Non-Condensing Operating Temperature  Storage -20°C to 60°C IP rating IP65	Enclosure	Stainless Housing	Cooling System	Fanless design		
Temperature  Storage -20°C to 60°C IP rating IP65	Environment					
	Operating Humidity	10% to 90% RH, Non-Condensing		0°C to 45°C		
	Storage Temperature	-20°C to 60°C	IP rating	IP65		

Certification			
Certification	CE, FCC		
IO Ports			
Power Input	1 x M12 waterproof connector for 12V DC	USB Port	1x M12 waterproof connector for 2 x USB2.0
Serial Port	1 x M12 waterproof connector for RS232	LAN	1 x waterproof Giga LAN RJ45 connector
Indicator	1 x LED Indicator for power 1 x LED Indicator for storage		
Control			
Button	1 x Power Button 1 x Reset Button		
Accessory			
Accessory	100~240V AC to DC Adapter with waterproof connector Power Cord External USB cable with waterproof connector External COM cable with waterproof connector External LAN cable with waterproof connector Waterproof caps VESA screws		
Power			

# DIMENSIONS UNIT:MM

**Power Rating** 

12V DC (M12 type)

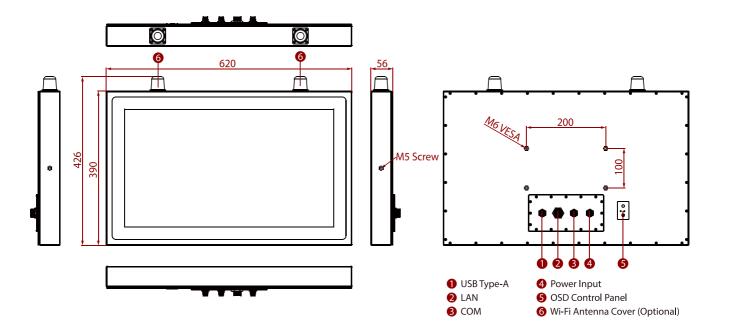

### **NOTE**

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. Please contact our sales representative if you need further product information.
- 3. All specifications are subject to change without prior notice.
- 4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.