

# W24L100-PMC10D

## 23.8" Resistive Touch Panel Mount Display



### KEY FEATURES


- Sunlight readable with high brightness solution
- Support panel mount
- Operating temperature:-10~60°C
- Optional operating temperature : -25~60°C with heater solution
- Support resistive touch
- Optional solar radiation protection with UV film for directed sunlight environment



### SPECIFICATIONS

| Display                      |  |
|------------------------------|--|
| <b>Resolution</b>            | 1920x1080  |
| <b>Contrast Ratio</b>        | 1000:1   |
| <b>Display Color</b>         | 16.7M Colors   |
| <b>Active Area</b>           | 527.04x296.46 mm   |
| <b>Size</b>                  | 23.8 inches  |
| <b>Panel Brightness</b>      | 1000 nits  |
| <b>View Angles</b>           | 88,88,88,88  |
| <b>Touch / Glass</b>         | Resistive Touch Screen<br>Protection Glass w/o Touch Function (Optional)   |
| Environment                  |  |
| <b>Operating Humidity</b>    | 10% to 90% RH, Non-Condensing  |
| <b>Storage Temperature</b>   | -20°C to 70°C  |
| <b>Operating Temperature</b> | -10°C to 60°C  |
| Certification                |  |
| <b>Certification</b>         | CE, FCC  |
| IO Ports                     |  |
| <b>USB Port</b>              | 1 x USB for Touch Screen   |
| <b>Audio</b>                 | Audio line in (3.5mm) (Optional)<br>2 x Speaker (Optional)   |
| <b>Video</b>                 | 1 x VGA<br>1 x HDMI (Optional)<br>1 x DVI (Optional)   |
| Mechanical                   |  |
| <b>Dimension</b>             | 606 x 376 x 65 mm  |
| <b>Mounting</b>              | VESA Mount/ Panel Mount  |
| <b>Cooling System</b>        | Fanless Design   |
| <b>Weight</b>                | 8.5 kg   |
| <b>Enclosure</b>             | Metal Housing with Aluminum Bezel  |
| <b>Cut out</b>               | 560 x 330mm  |
| Accessory                    |  |
| <b>Accessory</b>             | 1 x VGA cable<br>1 x HDMI cable<br>100~240V AC to DC Adapter<br>Power Cord<br>Manual<br>VESA screws(Varies by product) |
| <b>Optional Accessory</b>    | Remote Controller (Optional,Varies by product)   |
| Power                        |  |
| <b>Power Rating</b>          | 24V DC in  |
| Control                      |  |

**DIMENSIONS** UNIT:MM

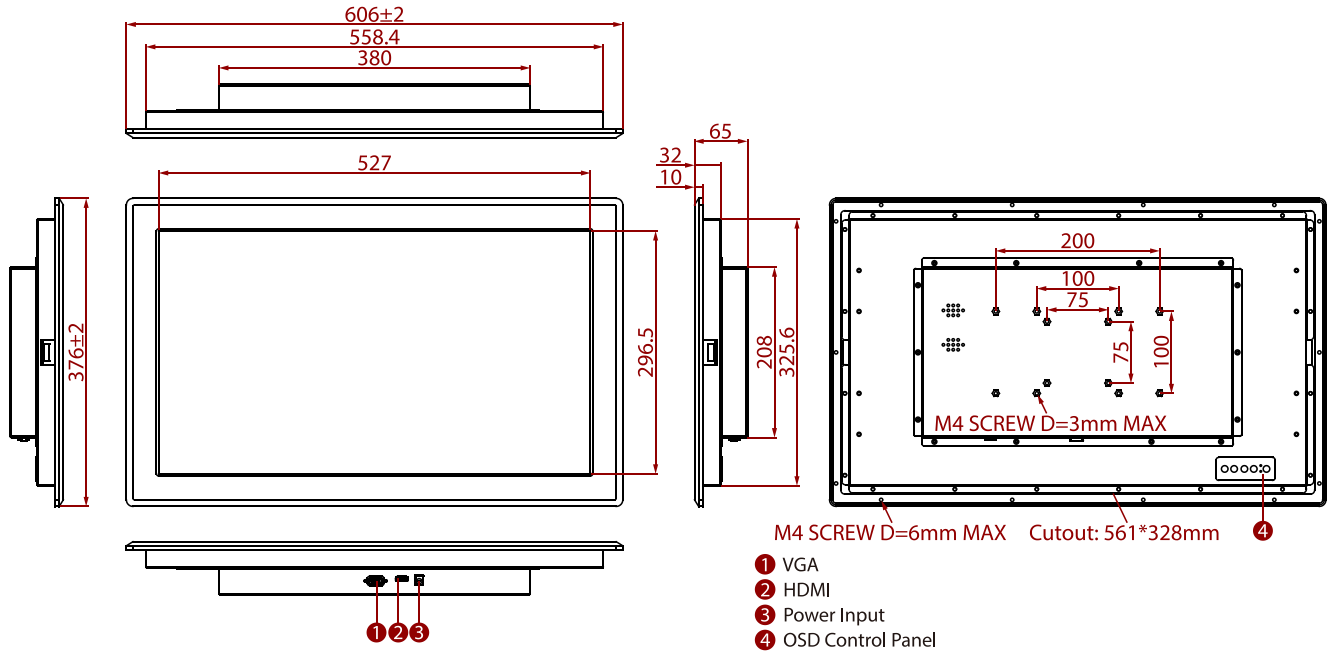

**NOTE**

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.