IBMH100

Intel® Atom® E3845 M Series Box PC



Intel Atom E3845 1.91GHz

KEY FEATURES

- Auto detection of the connected display, No settings necessary
- Quick & Easy Replaceable Hard Disk Design, No Tools needed
- Support wide range 12-24V DC input embedded single board computer

2 x SO-DIMM, DDR3L 1600 MHz, 4GB

- Optional with Modular front Display as a Panel PC
- Internal 64G mSATA SSD, Removable 1 Bay 2.5" SSD Slot



Memory

SPECIFICATIONS

System Specification

Processor

| FIOCESSOI | III.EI Aloiii E3043 1.91GHZ | Memory | 8GB (Optional) |
|------------------------|--|--------------------------|---|
| Storage | 1 x mSATA 128GB 1 x 2.5" 128GB SSD up to 512GB (Optional) | Ethernet controller | 2 x Intel® Ethernet Controller |
| Security | TPM 1.2 | Operating System | Windows 7 Embedded Systems (Optional) Windows 10 IoT Enterprise (64 bit) (Optional) Linux Ubuntu 20.04 (Optional) |
| WLAN | Support (Optional) | ВТ | Support (Optional) |
| Expansion Port | Modular Design for easy service in the field | | |
| Mechanical | | | |
| Dimension | 276 x 207 x 45.2 mm | Weight | 2.4kg |
| Mounting | Desk Mount | Enclosure | Metal Housing |
| Cooling System | Fanless design | | |
| Environment | | | |
| Operating Humidity | 10% to 90% RH, Non-Condensing | Operating Temperature | 0°C to 50°C |
| Storage Temperature | -10°C to 60°C | | |
| Certification | | | |
| Certification | CE, FCC | | |
| IO Ports | | | |
| Power Input | 1 x 12~24V DC, 3-Pin Terminal Block | USB Port | 4 x USB2.0 (Type-A) |
| Serial Port | 1 x RS232/422/485 (Default RS232) | Video | 1 x HDMI 1.4 (Optional) 1 x VGA (Optional) |
| Audio | Line in Line out | Expansion Port | 1 x mPCle slot(for half size Wifi module) Swappable 2.5" HDD/SSD Bay Slot |
| LAN | 2 x Giga LAN RJ45 Connector | Indicator | 1 x LED Indicator for storage |
| mini PCle | 1 x Mini PCIE(For WLAN) | | |
| Control | | | |
| Button | 1 x Power Button with LED Indicator 1 x Reset Button | | |

Accessory

Accessory 100~240V AC to DC Adapter

Power Cord

Open Wire Cable with terminal block connector


VESA screws

Power

Power Rating 12V~24V DC with protection fuse Adapter 12V 80W

DIMENSIONS

UNIT:MM

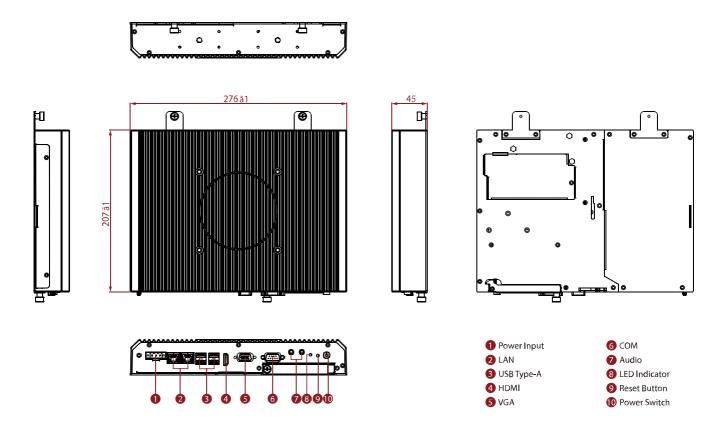

NOTE

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. Please contact our sales representative if you need further product information.
- 3. All specifications are subject to change without prior notice.
- 4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.