R12T600-IPL1

12.1" Front IP65 Display




KEY FEATURES

- 12.1", 800 x 600
- VGA and HDMI input
- Panel mount
- VESA mount
- Front IP65 waterproof and dustproof



SPECIFICATIONS

| Display | | | |
|------------------------|---|--------------------------|--|
| Resolution | 800x600 | Size | 12.1 inches |
| Contrast Ratio | 700:1 | Panel Brightness | 450.0 nits |
| Display Color | 16.2M Colors | View Angles | 80,80,75,65 |
| Active Area | 246x184.5 mm | Touch / Glass | Resistive Touch Screen Protection Glass w/o Touch Function (Optional) SAW Touch (Surface Acoustic Wave) (Optional) |
| Environment | | | |
| Operating Humidity | 10% to 90% RH, Non-Condensing | Operating Temperature | 0°C to 50°C |
| Storage Temperature | -10°C to 60°C | | |
| Certification | | | |
| Certification | CE, FCC | | |
| IO Ports | | | |
| USB Port | 1 x USB for Touch Screen | Video | 1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional) |
| Audio | Audio line in (3.5mm) (Optional) 2 x Speaker (Optional) | | |
| Accessory | | | |
| Accessory | 1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product) | Optional Accessory | Remote Controller (Optional, Varies by product) |
| Power | | | |
| Power Rating | 12V DC in 24V DC in (optional) | | |
| Control | | | |
| Button | 5 Keys: - , + , Power , Esc , Enter | | |

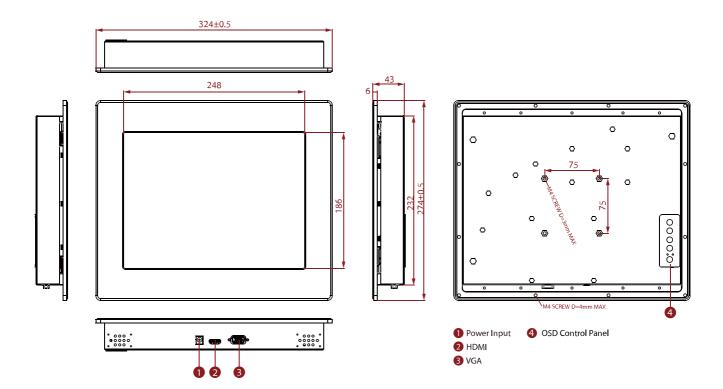

NOTE

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. Please contact our sales representative if you need further product information.
- 3. All specifications are subject to change without prior notice.
- 4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.