R15L100-SPC3

15" IP65 Stainless PCAP Chassis Display



KEY FEATURES

- 15", 1024x768
- Support VESA / YOKE mount
- Chassis
- Stainless housing SUS 316 / AISI 316
- Full IP65 waterproof and dustproof
- Optical bonding (optional)



SPECIFICATIONS

| Display | | | |
|------------------------|---|--------------------------|--|
| Resolution | 1024x768 | Size | 15 inches |
| Contrast Ratio | 2000:1 | Panel Brightness | 300 nits |
| Display Color | 16.2M Colors | View Angles | 88,88,88,88 |
| Active Area | 304.1x228.1 mm | Touch / Glass | Projected Capacitive Multi Touch Screen |
| Mechanical | | | |
| Dimension | 378 x 301 x 56.4 mm | Mounting | VESA Mount Yoke Mount |
| Enclosure | Stainless Housing | Cooling System | Fanless design |
| Environment | | | |
| Operating Humidity | 10% to 90% RH, Non-Condensing | Operating Temperature | 0°C to 45°C |
| Storage Temperature | -20°C to 60°C | IP rating | IP65 |
| Certification | | | |
| Certification | CE, FCC | | |
| IO Ports | | | |
| USB Port | 1 x M12 waterproof connector for touch screen control | Video | 1x M12 type connector for VGA input 1x waterproof connector for DVI input (Optional) 1x waterproof connector for HDMI input (Optional) |
| Indicator | 1 x LED Indicator for power 1 x LED Indicator for status | | |
| Control | | | |
| Button | 1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button | | |
| Accessory | | | |
| Accessory | 100~240V AC to DC Adapter with waterproof connector Power Cord | Optional Accessory | External HDMI cable with waterproof connector (Optional) External DVI cable with waterproof connector |

touchscreen control

External USB cable with waterproof connector for

External VGA cable with waterproof connector

(Optional)

Waterproof caps Manual VESA screws


| | _ | | | |
|---|---|---|---|---|
| _ | O | w | е | г |

Power Rating

12V DC (M12 type)

DIMENSIONS

UNIT:MM

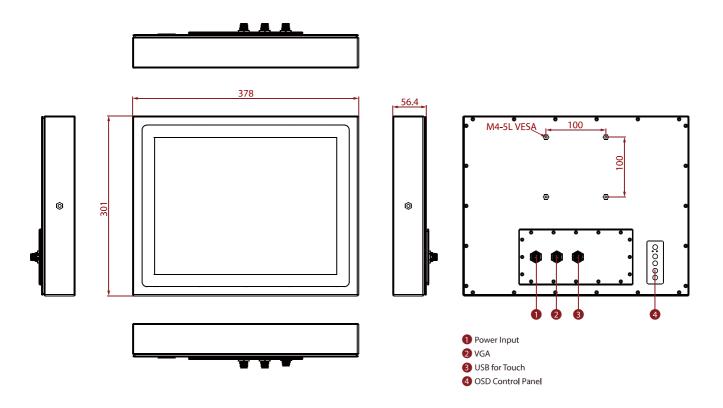

NOTE

- 1. This is a simplified drawing and some components are not marked in detail.
- 2. Please contact our sales representative if you need further product information.
- 3. All specifications are subject to change without prior notice.
- 4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.