

R15L600-67C3ST

15" IP67 Stainless Resistive Chassis Display



KEY FEATURES

- 15", 1024 x 768
- Support VESA / YOKE mount
- Chassis
- Stainless housing SUS 316 / AISI 316
- Full IP67 waterproof and dustproof



SPECIFICATIONS


| Display | | | |
|---------------------|---|-----------------------|--|
| Resolution | 1024x768 | Size | 15 inches |
| Contrast Ratio | 2000:1 | Panel Brightness | 300 nits |
| Display Color | 16.2M Colors | View Angles | 88,88,88,88 |
| Active Area | 304.1x228.1 mm | Touch / Glass | Resistive Touch Screen Bonding With Panel Protection Glass Without touch function (Optional) |
| Mechanical | | | |
| Dimension | 383 x 310 x 57 mm | Mounting | VESA Mount Yoke Mount |
| Enclosure | Stainless Housing | Cooling System | Fanless design |
| Environment | | | |
| Operating Humidity | 10% to 90% RH, Non-Condensing | Operating Temperature | 0°C to 45°C |
| Storage Temperature | -20°C to 60°C | IP rating | IP67 |
| Certification | | | |
| Certification | CE, FCC | | |
| IO Ports | | | |
| Power Input | 1 x M12 waterproof connector for 12V DC | USB Port | 1x M12 waterproof connector for touch screen control (Optional) |
| Serial Port | 1 x M12 waterproof connector for touch screen control (Optional) | Video | 1x M12 type connector for VGA input 1x waterproof DVI input (Optional) 1x waterproof connector for HDMI input (Optional) |
| Indicator | 1 x LED Indicator for power 1 x LED Indicator for status | | |
| Control | | | |
| Button | 1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button | | |
| Accessory | | | |
| Accessory | 100~240V AC to DC Adapter with waterproof connector | Optional Accessory | Yoke mount stand (Optional) External HDMI cable with waterproof connector |

Power Cord
 External VGA cable with waterproof connector
 External USB or RS232 cable with waterproof connector for touchscreen control
 Waterproof caps
 Manual
 VESA screws

(Optional)
 External DVI cable with waterproof connector
 (Optional)

| | |
|---------------------|-------------------|
| Power | |
| Power Rating | 12V DC (M12 type) |

DIMENSIONS UNIT:MM

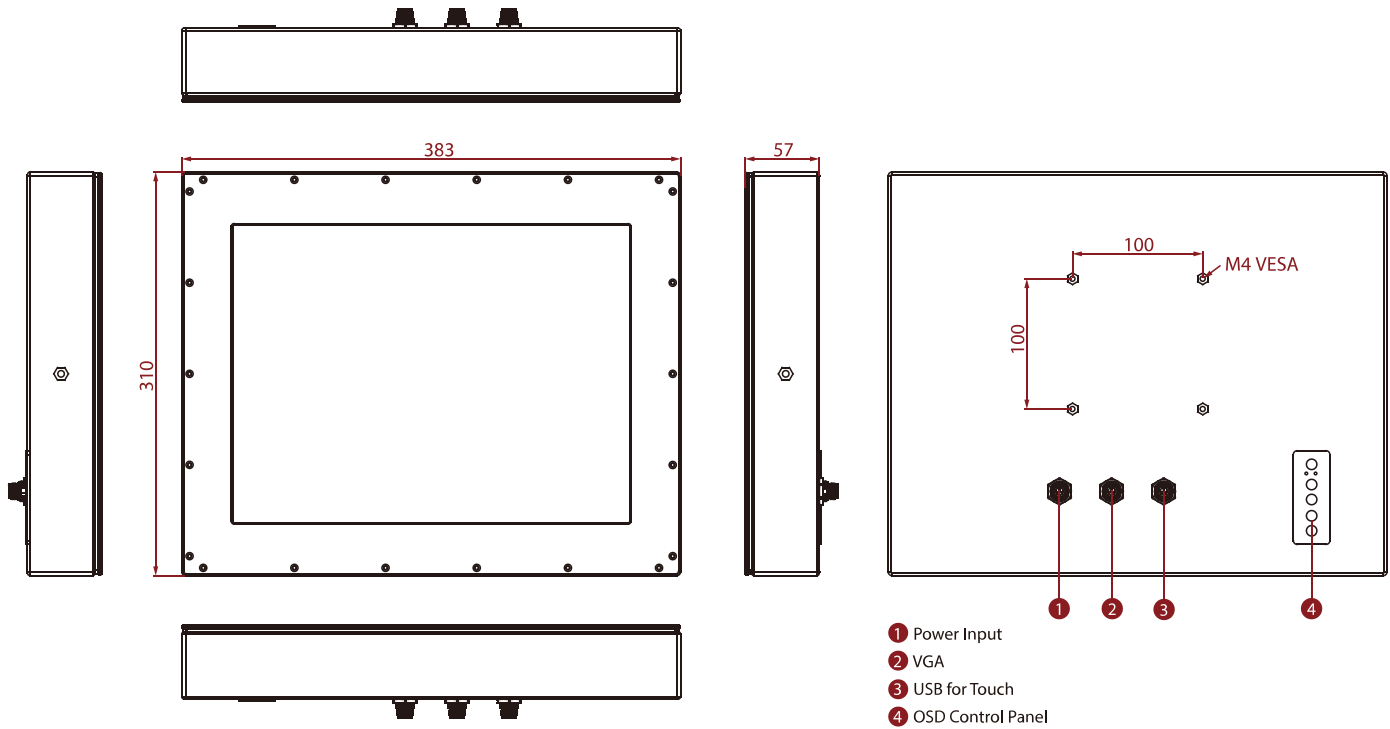

- NOTE**
1. This is a simplified drawing and some components are not marked in detail.
 2. Please contact our sales representative if you need further product information.
 3. All specifications are subject to change without prior notice.
 4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.