W43L100-65A1

43" IP65 Stainless Chassis Display

KEY FEATURES

- 43", 1920 x 1080 IP65 Stainless Chassis Display
- Chassis
- VESA mount
- Stainless housing SUS 316 / AISI 316
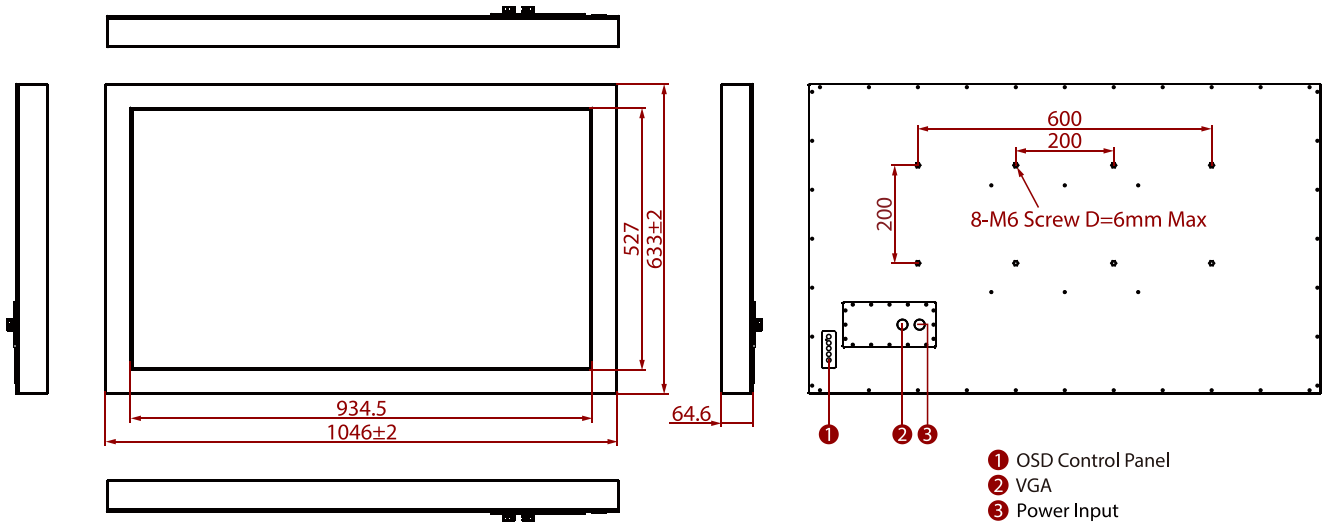- Full IP65 waterproof and dustproof

SPECIFICATIONS

Display

Touch / Glass	Protection Glass	**Resolution**	1920x1080
Size	42.5 inches	**Contrast Ratio**	4000:1
Panel Brightness	500 nits	**Display Color**	16.7M Colors
View Angles	89,89,89,89	**Active Area**	940.896x529.254 mm

Mechanical

Dimension	1046 x 633 x 64.6 mm	**Mounting**	VESA Mount
Enclosure	Stainless Housing	**Cooling System**	Fanless design

Environment

Operating Humidity	10% to 90% RH, Non-Condensing	**Operating Temperature**	0°C to 45°C
Storage Temperature	-20°C to 60°C	**IP rating**	IP65

Certification

Certification	CE, FCC

IO Ports

Power Input	1 x M12 waterproof connector for 24V DC	**Video**	1x M12 type connector for VGA input 1x waterproof DVI input (Optional) 1x waterproof connector for HDMI input (Optional)
Indicator	1 x LED Indicator for power 1 x LED Indicator for status		

Control

Button	1 x Power Button 1 x Adjust up button 1 x Adjust down button 1 x ESC (Auto) button 1 x OK (Menu) button

Accessory

Accessory	100~240V AC to DC Adapter with waterproof connector Power Cord External VGA cable with waterproof connector Waterproof caps Manual VESA screws	**Optional Accessory**	External HDMI cable with waterproof connector (Optional) External DVI cable with waterproof connector (Optional) External Power cable with waterproof connector(For AC power buid in) (Optional)

WINMATE

Power	
Power Rating	24V DC (M12 type)

DIMENSIONS   UNIT:MM

8-M6 Screw D=6mm Max

600
200
200

527
633±2

934.5
1046±2

64.6

❶ OSD Control Panel
❷ VGA
❸ Power Input

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.