

F65EAC-IAD32

Waterproof Full IP65 EAC Box PC with M12 Connector, Intel® Core™ i5-1235U









KEY FEATURES

- Intel® 12th Generation Core™ i5-1235U Processor
- 1 x SO-DIMM, DDR5 4800 MHz (Max. 32GB)
- 1 x M.2 Key M Slot for M.2 2280 NVME SSD
- Full IP65 Rugged Embedded PC
- Full Aluminum Alloy Enclosure with fin
- Fnless design with M12 waterproof connector
- Wide Range 9 to 36V DC Input with isolation

INTRODUCTION

Winmate Waterproof Full IP65 EAC Box PC Series is a rugged, fanless solution designed to operate reliably in extreme industrial environments. Featuring full IP65 protection, aluminum alloy housing, and M12 waterproof connectors, it resists dust, water, vibrations, and electromagnetic interference. Powered by 11th and 12th Gen Intel® Core™ processors, with support for DDR5 RAM and M.2 NVMe SSDs, these compact Box PCs deliver high performance and flexibility. Ideal for manufacturing, transportation, and harsh outdoor settings, they ensure durability and seamless connectivity in demanding conditions.


SPECIFICATIONS

| System Specificati | ion | | |
|---------------------|---|-----------------------|--|
| WLAN | Support (Optional) | вт | Support (Optional) |
| Processor | Intel® Core™ i5-1235U 3.3GHz(up to 4.40 GHz) | Memory | 1 x SO-DIMM, DDR5 4800 MHz, 8GB 16GB (Optional) 32GB (Optional) |
| Storage | 1 x M.2 2280 M-Key NVMe SSD 256GB 512GB (Optional) 1TB (Optional) 2TB (Optional) | Ethernet controller | 2 x Intel® Ethernet Controller |
| Security | TPM 2.0 | Operating System | Windows 11 IoT Enterprise (64 bit) (Optional) Windows 11 Pro 64 bit (Optional) Linux Ubuntu 22.04(Do not support Wake on Touch) (Optional) |
| Mechanical | | | |
| Dimension | 250 x 205 x 55 mm | Weight | 3.0 kg |
| Mounting | Desk mount | Enclosure | Aluminum Housing |
| Cooling System | Fanless Design | | |
| Environment | | | |
| Operating Humidity | 10% to 90% RH, Non-Condensing | Operating Temperature | -10°C to 45°C |
| Storage Temperature | -20°C to 60°C | Shock | Operating, IEC 60068-2-27 |
| Vibration | Operating, IEC 60068-2-64 | IP rating | IP65 |
| Certification | | | |
| Certification | CE, FCC | | |
| IO Ports | | | |



| Power Input | 1 x M12 waterproof connector for 9~36V DC | USB Port | 1 x M12 waterproof connector for 2 x USB2.0 1 x Waterproof USB Type-A Connector with cover |
|-------------|--|--------------------|---|
| Serial Port | | | 1x Waterproof connector for HDMI output |
| | 1 x M.2 2230 E-Key Slot (for Wi-Fi Module) | LAN | 1 x M12 type connector for Giga LAN |
| | 1 x LED Indicator for power 1 x LED Indicator for storage 1 x LED Indicator for LAN | | |
| Control | | | |
| Button | 1 x Power Button with LED Indicator | | |
| Accessory | | | |
| Accessory | External open wire Power cable with waterproof connector External USB cable with waterproof connector External HDMI cable with waterproof connector External COM cable with waterproof connector External LAN cable with waterproof connector Waterproof caps RJ45 female-female converter | Optional Accessory | 100~240V AC to DC Adapter with waterproof connector (Optional) Power Cord (Optional) |

DIMENSIONS UNIT:MM

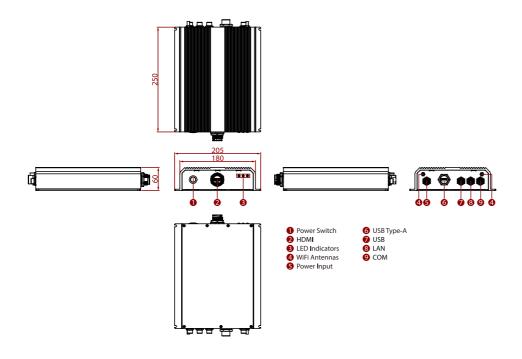

NOTE

- 1. This is a simplified drawing and some components are not marked in detail.
- 2.Please contact our sales representative if you need further product information.
- 3.All specifications are subject to change without prior notice.

 4.The product shown in this datasheet is a standard.
- 4. The product shown in this datasheet is a standar model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.