

R12L600-CHM2OD

12.1" Resistive Touch Chassis Display



KEY FEATURES

- Sunlight readable with high brightness solution
- Support VESA mount
- Operating temperature:-10~60°C
- Optional operating temperature : -25~60°C with heater solution
- Support resistive touch
- Optional solar radiation protection with UV film for directed sunlight environment




SPECIFICATIONS

Display	
Resolution	1024x768
Contrast Ratio	700:1
Display Color	16.2M Colors
Active Area	261.12x163.2 mm
Size	12.1 inches
Panel Brightness	1000.0 nits
View Angles	80,80,70,70
Touch / Glass	Resistive Touch Screen Protection Glass w/o Touch Function (Optional)
Environment	
Operating Humidity	10% to 90% RH, Non-Condensing
Storage Temperature	-20°C to 70°C
Operating Temperature	-10°C to 60°C
Certification	
Certification	CE, FCC
IO Ports	
USB Port	1 x USB for Touch Screen
Video	1 x VGA 1 x HDMI (Optional) 1 x DVI (Optional)
Audio	Audio line in (3.5mm) (Optional) 2 x Speaker (Optional)
Mechanical	
Dimension	290 x 230 x 45 mm
Mounting	VESA Mount
Cooling System	Fanless Design
Weight	2 kg
Enclosure	Metal
Accessory	
Accessory	1 x VGA cable 1 x HDMI cable 100~240V AC to DC Adapter Power Cord Manual VESA screws(Varies by product)
Optional Accessory	Remote Controller (Optional,Varies by product)
Power	
Power Rating	12V DC in 24V DC in (optional)

Control

Button 5 Keys: -, +, Power, Esc, Enter

DIMENSIONS UNIT:MM

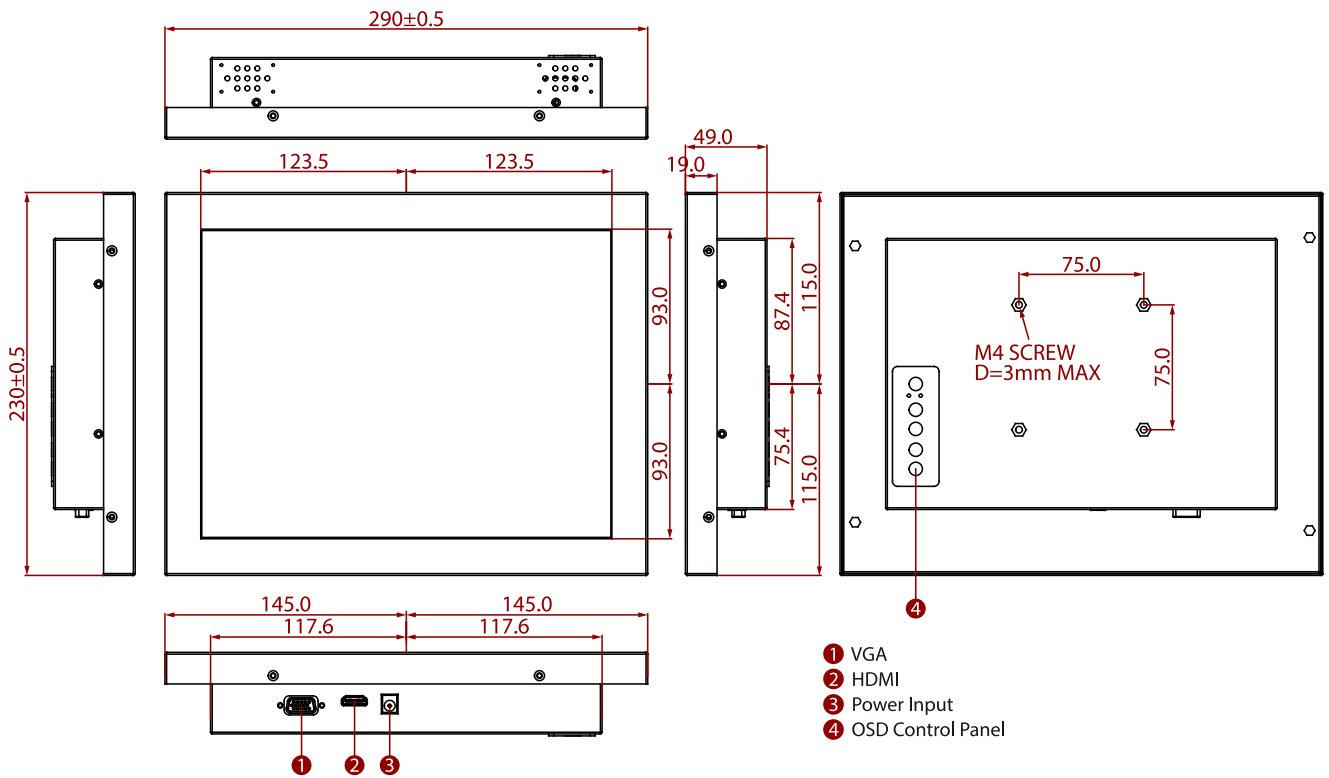

NOTE

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.