

# W24L100-CHS1

## 24" Chassis Display



### KEY FEATURES


- 24", 1920 x 1200 Chassis Display
- VGA input
- Chassis
- VESA mount



### SPECIFICATIONS

| Display                    |  |                              |  |
|----------------------------|--|------------------------------|--|
| <b>Resolution</b>          | 1920x1200  | <b>Size</b>                  | 24 inches  |
| <b>Contrast Ratio</b>      | 1000:1   | <b>Panel Brightness</b>      | 300 nits   |
| <b>Display Color</b>       | 16.7M Colors   | <b>View Angles</b>           | 89,89,89,89  |
| <b>Active Area</b>         | 518.4 x 324.0 mm   | <b>Touch / Glass</b>         | Resistive Touch Screen<br>Protection Glass w/o Touch Function (Optional)<br>SAW Touch (Surface Acoustic Wave) (Optional) |
| Environment                |  |                              |  |
| <b>Operating Humidity</b>  | 10% to 90% (non-condensing)  | <b>Operating Temperature</b> | 0~50°C   |
| <b>Storage Temperature</b> | -10~60°C   |                              |  |
| Certification              |  |                              |  |
| <b>Certification</b>       | CE, FCC  |                              |  |
| IO Ports                   |  |                              |  |
| <b>USB Port</b>            | 1 x USB for Touch Screen   | <b>Video</b>                 | 1 x VGA<br>1 x HDMI (Optional)<br>1 x DVI (Optional)   |
| <b>Audio</b>               | Audio line in (3.5mm) (Optional)<br>2 x Speaker (Optional)   |                              |  |
| Mechanical                 |  |                              |  |
| <b>Dimension</b>           | 564 x 370 x 59 mm  | <b>Mounting</b>              | VESA Mount   |
| <b>Enclosure</b>           | Metal  | <b>Cooling System</b>        | Fanless Design   |
| Accessory                  |  |                              |  |
| <b>Accessory</b>           | 1 x VGA cable<br>1 x HDMI cable<br>100~240V AC to DC Adapter<br>Power Cord<br>Manual<br>VESA screws(Varies by product) | <b>Optional Accessory</b>    | Remote Controller (Optional,Varies by product)   |
| Power                      |  |                              |  |
| <b>Power Rating</b>        | 12V DC input   |                              |  |
| Control                    |  |                              |  |

**DIMENSIONS** UNIT:MM

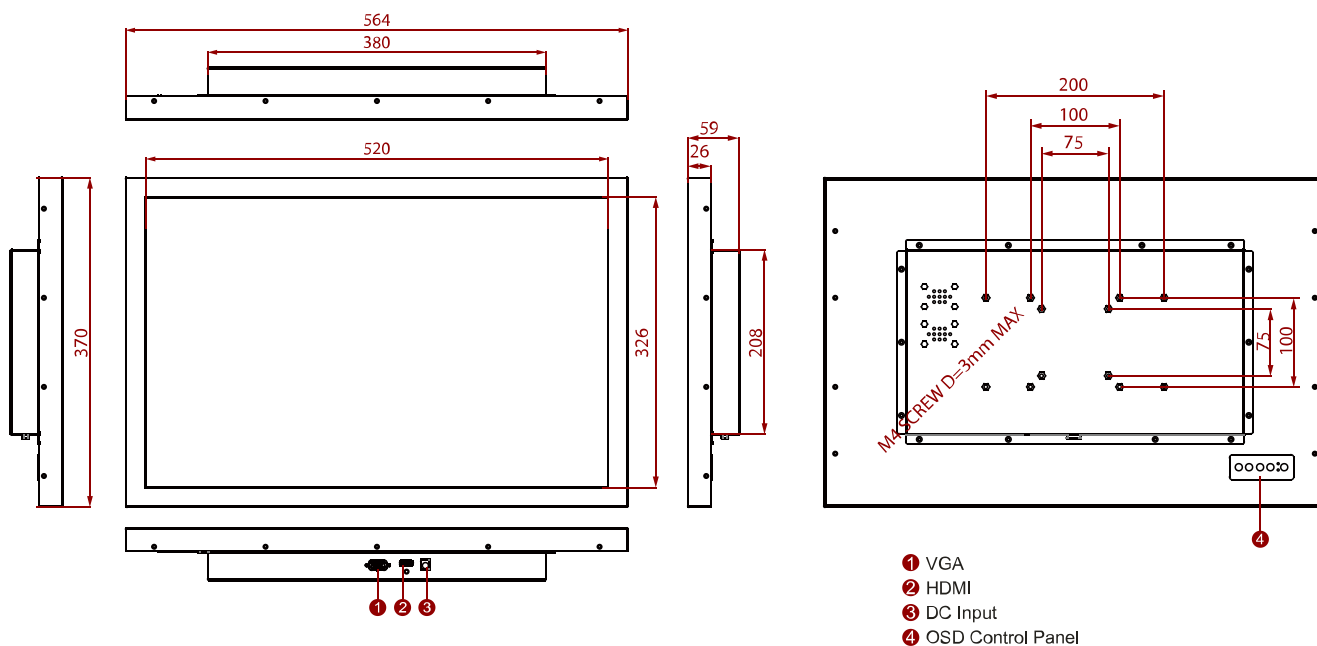

**NOTE**

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.