

# R15L100-STC3

## 15" Stainless Panel Mount Display



### KEY FEATURES


- 15", 1024 x 768
- VGA and HDMI input
- Panel mount
- VESA mount



### SPECIFICATIONS

Display			
<b>Resolution</b>	1024x768	<b>Size</b>	15 inches
<b>Contrast Ratio</b>	2000:1	<b>Panel Brightness</b>	300 nits
<b>Display Color</b>	16.2M Colors	<b>View Angles</b>	88,88,88,88
<b>Active Area</b>	304.1x228.1 mm	<b>Touch / Glass</b>	Resistive Touch Screen (Optional) Protection Glass Without Touch Function (Optional)
Mechanical			
<b>Dimension</b>	396 x 316 x 56.8 mm	<b>Mounting</b>	Panel mount VESA Mount
<b>Enclosure</b>	Stainless front bezel	<b>Cooling System</b>	Fanless design
Environment			
<b>Operating Humidity</b>	10% to 90% RH, Non-Condensing	<b>Operating Temperature</b>	0°C to 50°C
<b>Storage Temperature</b>	-10°C to 60°C	<b>IP rating</b>	Front IP65
Certification			
<b>Certification</b>	CE, FCC		
IO Ports			
<b>Power Input</b>	1 x 12V DC, 2.5φ DC jack	<b>USB Port</b>	1x USB type-A for touch screen control (Optional)
<b>Serial Port</b>	1 x RS232 D-sub9 for touch screen control (Optional)	<b>Video</b>	1x VGA input 1x HDMI input (Optional) 1x DVI input (Optional)
<b>Indicator</b>	1 x LED Indicator for power 1 x LED Indicator for status		
Accessory			
<b>Accessory</b>	100~240V AC to DC Adapter Power Cord External USB Cable For Touchscreen Control External VGA Cable External HDMI Cable VESA Screws	<b>Optional Accessory</b>	External DVI Cable (Optional)
Power			
<b>Power Rating</b>	12V DC		

**DIMENSIONS** UNIT:MM

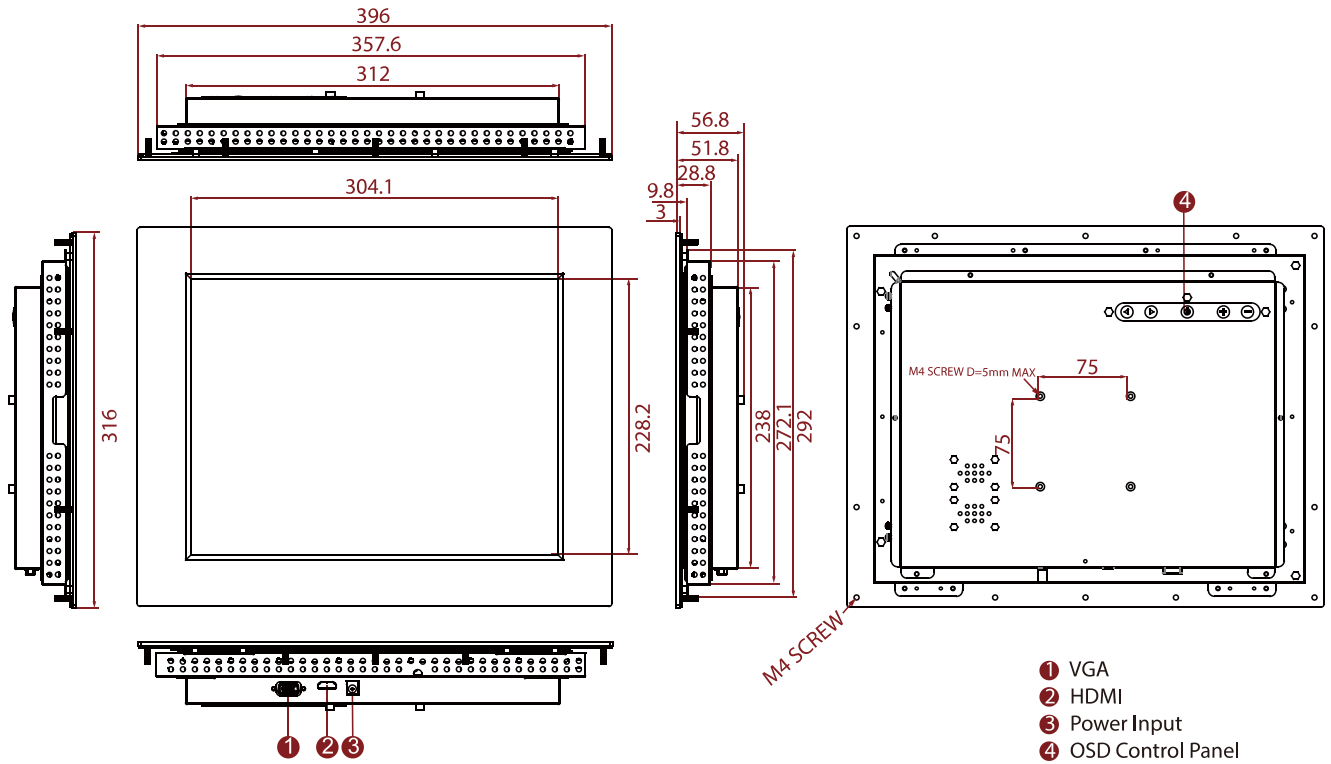

**NOTE**

1. This is a simplified drawing and some components are not marked in detail.
2. Please contact our sales representative if you need further product information.
3. All specifications are subject to change without prior notice.
4. The product shown in this datasheet is a standard model. For diagrams that contain customized or optional I/O, please contact the Winmate Sales Team for more information.